(54) Title: DATA RE-ROUTING METHOD FOR DUAL MODE TERMINAL AFTER HANDOVER
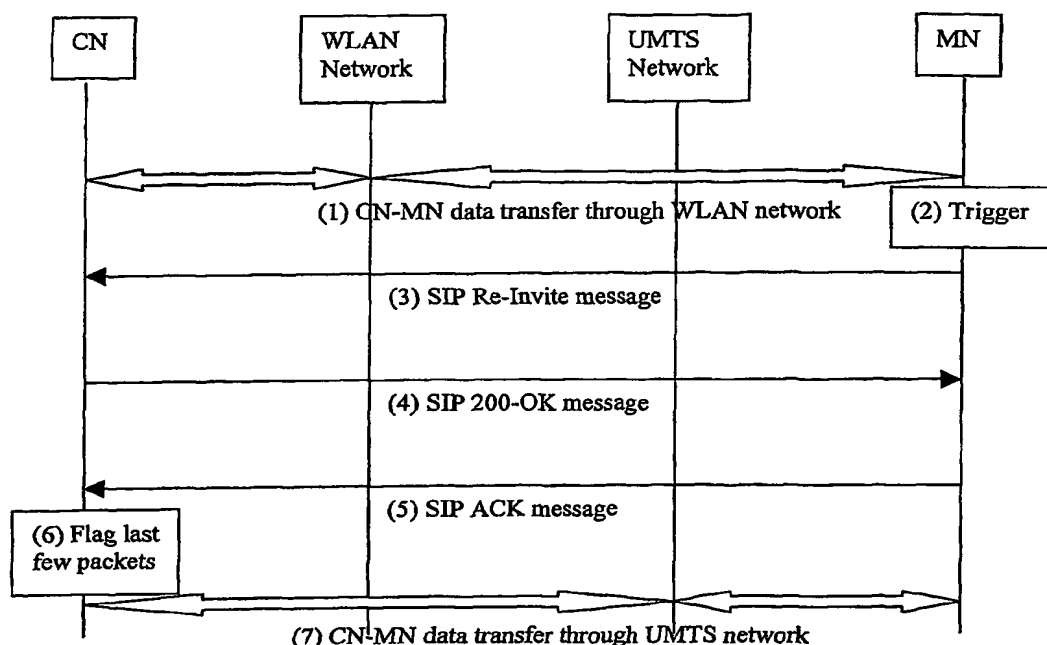
(57) Abstract: A dual mode (e.g. WLAN/UMTS) terminal with two network interfaces sends one interface to sleep mode following handover from one network to the other. Here sleep mode is synchronised with the end of the data stream, either by marking the stream or in response to sending a handover related SIP ACK message to the corresponding node.

European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:
— with international search report

— before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.